

2900

ALUMINIUM SERIES



Polyamide strut
thermal break system

All framing constructed
with double thermal breaks

Double and triple
glazing options

Unique meeting rail offset
thermal break design

Heavy duty tubular
meeting rails

Pressure equalized
sill design


Frame depths
of 5" and 5 5/8"

EFFICIENCY. QUALITY. HIGH VALUE.



Introducing the Innovative 2900 Series Thermal Door

The innovative **2900 Series** patio door offers superior thermal and structural advantages—with a level of performance unparalleled in aluminum sliding doors. Enjoy reduced maintenance with Sunview engineering's quality, styling and beauty plus enhanced insulation for energy and economy in cold weather. Aluminum doors also play a vital role in controlling temperatures in summer, too. Choose the **2900 Series** Thermal Door for strength and lasting value, with improved thermal technology and the ultimate in flexible configurations.

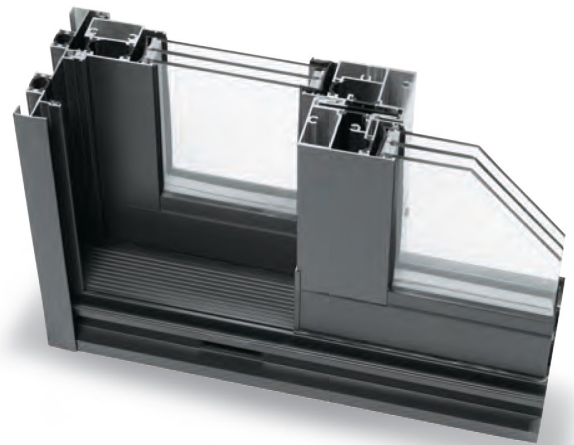

Performance:

- U-value of 0.248 (Btu/h x ft² x °F) with triple glazing and Low-E argon glazing
- Meets Zone C Energy Star rating
- Meets the new NAFS deflection requirements for a CW-45 rating
- Provides water resistance at 730 Pascals equal to blowing rain at 120 kph